


MOUNT ASSEMBLY


Attach Actuator Mount

- If you are located east of 106° W longitude, attach the actuator mount as shown in the left photo. If you are west of this longitude, refer to the right photo.

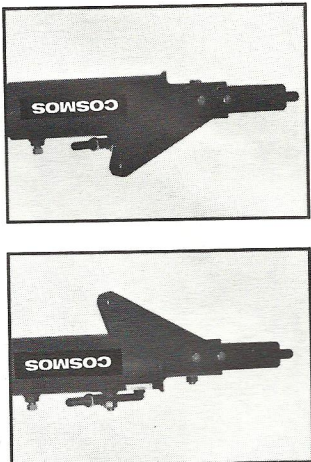



Attach Swivel Collar

- If your system is equipped with a motor-driven actuator, refer to the actuator manual. Bolt the swivel collar to the actuator mount, and loosen the pinch bolts. Otherwise, attach the manual azimuth bar assembly to the actuator mount.

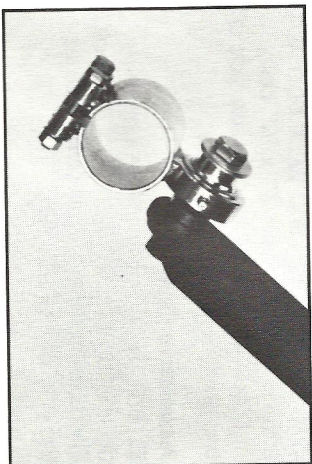

Assembly Actuator

- If you are east of 106° W longitude, slide the actuator into the swivel collar as shown in the photo to the right.
- If you are west of 106° W longitude, assemble the actuator as shown in the lower photo.
- Tighten the pinch bolts and install the end seal in the actuator tube. The mount is now ready to accept the dish.

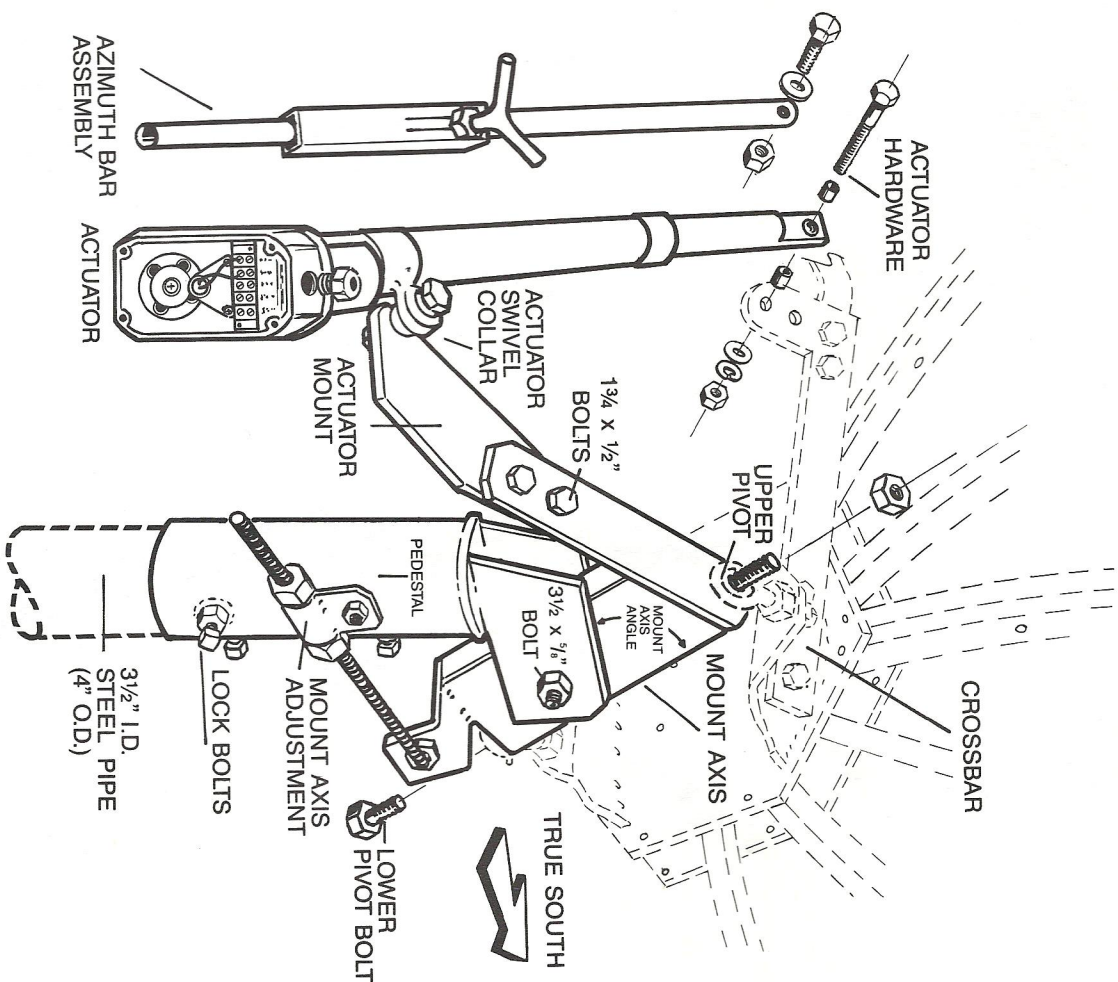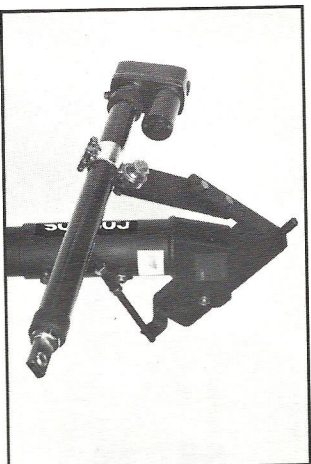

COMPLETE MOUNT ASSEMBLY
(Shown assembled for locations west of 106° longitude)