

FEATURES INCLUDE:

- MPEG-4/MPEG-2 technology
- HD/SD satellite tuner¹
- Digital off-air tuner¹
- HDTV digital audio/video output²
- USB 2.0 port
- 942-style user interface (UI)
- DishHOME Interactive TV
- Up to 2-day Picture-In-Guide with optional widescreen Electronic Program Guide (EPG)
- Parental locks
- On-screen Caller ID with history³
- Software upgradeable via satellite
- DishCOMM™ compatible⁴
- 5.3 IR remote control

¹Additional authorization may be required before high definition programming and/or off-air digital broadcasts can be viewed; additional fees may apply.

²Compatible with HDMI-equipped televisions.

³Requires Caller ID subscription with local phone company. Phone line must be connected to receiver.

⁴Enabled with a future software upgrade.

DESCRIPTION

ViP211 is a high definition (HD) satellite receiver that supports both MPEG-4 and MPEG-2 compression technology.

FEATURES

- View MPEG-4 and MPEG-2 DISH Network programming.
- View HD or SD DISH Network programming¹.
- View off-air digital broadcasts¹.
- TV display resolutions: 480i, 480p, 720p, 1080i.
- Simultaneous output from HD and SD connections.
- DishCOMM technology² allows phone and audio data to be sent throughout a home over existing power wiring. Requires only one phone line connection among all DISH Comm-enabled receivers in a home.
- DishHOME Interactive TV.
- Caller ID with history for up to 50 events.
- On-screen Electronic Program Guide (EPG) with instant access to up to two days of program listings and information. Includes new optional widescreen 3-hour format.
- The receiver will respond to discrete ON and OFF remote control commands.

FRONT PANEL FEATURES


- Five buttons: Cursor Up, Down, and SELECT navigation buttons; POWER and SYSTEM INFO.
- Green light indicates receiver is powered on.
- Smart card receptacle (unused).
- IR blast and receive.

REAR PANEL FEATURES

- 1 satellite tuner input
- 1 ATSC antenna input for off-air digital broadcasts¹
- 1 USB 2.0 port³
- 1 Ethernet Port³
- 1 telephone jack
- 3-prong power cord
- A/V connections
 - 1 digital audio/video output for HDMI-equipped TVs
 - 1 set of Component (Y Pr Pb) HD analog video outputs
 - 1 S-Video output
 - 1 set RCA-type audio/video outputs
 - 1 Channel 3/4 modulated output
 - 1 optical digital output for Dolby® Digital and PCM Digital audio

REMOTE CONTROL

- 5.3 infrared (IR) universal 4-component remote control:
 - can be programmed to operate (via IR) up to three additional components such as TVs, VCRs and DVD players.
 - AUX mode to operate a second DISH Network satellite receiver via IR or UHF.
 - Dedicated "TV Power" button.
 - "Recover" button toggles through TV and VCR inputs to help user return to satellite programming when they accidentally change channels on their TV or VCR.
 - Color iTV buttons

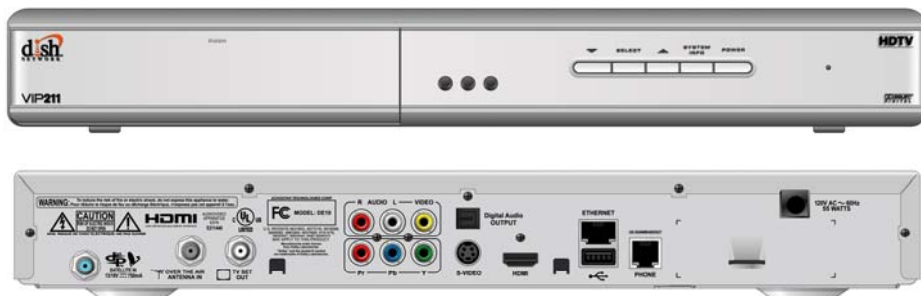

SPECIFICATIONS

- Dimensions (approx.): H: 2" x W: 16" x D: 12 1/4"
- Weight (approx.): 7 lbs.
- Color: Silver

ViP211

Why MPEG-4?

Programs encoded using MPEG-4 do not take up as much bandwidth as those encoded using MPEG-2. As a result, we can provide more channels to customers with the same amount of satellite bandwidth.

How does the ViP211 differ from the DISH 411?

They are essentially the same, but the ViP211 has an Ethernet port.

Can I watch analog or digital off-air broadcasts?

You can watch digital off-air broadcasts only¹. The ViP211 does not have an analog NTSC tuner, but it can pass an analog signal through to your TV when the receiver is in standby (off).

Can I watch HD satellite channels using my SD outputs?

Yes, but they will be down-converted to standard definition (480i).

How many Caller ID events will the ViP211 store?

It will store up to 50, but they will be deleted if the receiver is reset.

Can I use the USB 2.0 port?

This port is currently disabled and is reserved for future use.

What's the Ethernet port² for?

This will be discussed in a future document revision.

What is the DishCOMM™ feature?

DishCOMM is based on Home Plug 1.0 technology, which allows audio and phone data to be sent throughout a home over existing power wiring to other satellite receivers and compatible devices.

In a household with multiple DishCOMM-enabled receivers, only one receiver requires direct connection to a phone jack. All other receivers can transmit phone data over the power wiring to the receiver connected to the phone jack.

ViP211 & 811 Comparison

	ViP211	811
MPEG-4	Yes	No
Off-air tuner	Digital with analog pass through ¹	Analog/digital
942-style UI	Yes	No
DishCOMM ³	Yes	No
USB 2.0 ³	1	No
Ethernet Port ³	1	No
DVI	No	Yes
HDTV digital output	Yes	No
A/V inputs	No	2 sets
Remote control	IR	UHF Pro

¹Additional authorization may be required before high definition programming and/or off-air digital broadcasts can be viewed; additional fees may apply.

²Enabled with a future software upgrade.