



4096-629
January 30, 2002

ASSEMBLY MANUAL
Revision C

.89/.98M Ku-BAND Rx/Tx SERIES 1892/1982 ANTENNA SYSTEM

PRODELIN CORPORATION
1500 Prodelin Drive
Newton NC 28658

.98M Ku-BAND Rx/Tx SERIES 1982 ANTENNA SYSTEM

C	Add .89M text	1/30/02	
B	Revised Diagrams and Text	1/25/02	JL
A	Revised Address	1/9/02	RAH
-	ORIGINAL RELEASE	3/8/01	CLT
REV.	DESCRIPTION	DATE	APPROVED

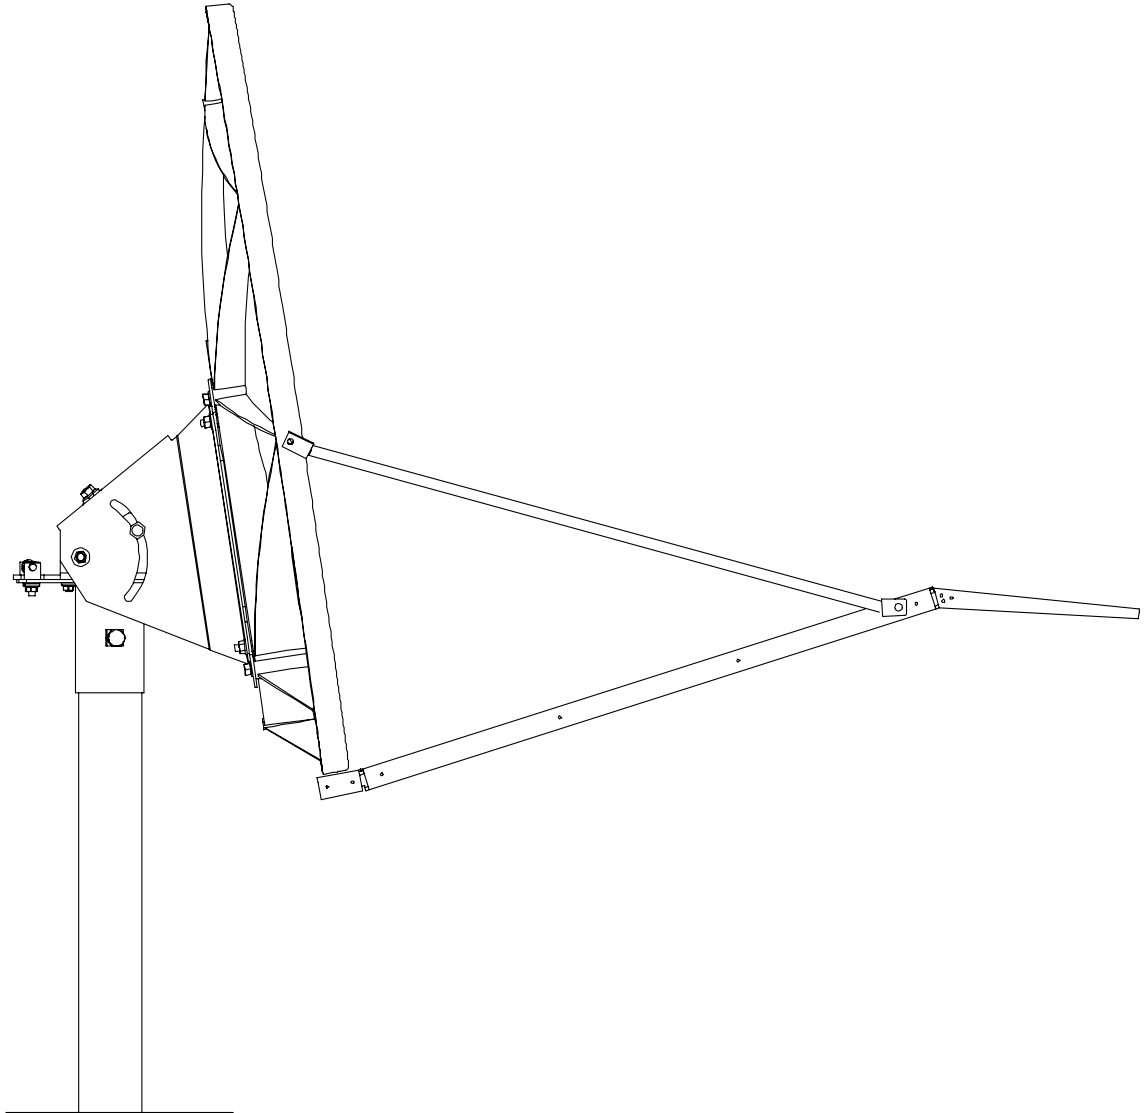


TABLE OF CONTENTS

<u>SECTION</u>	<u>TITLE</u>
I	INTRODUCTION
1.0	GENERAL INFORMATION
1.1	UNPACKING & INSPECTION
1.2	FREIGHT DAMAGE
1.3	MATERIAL MISSING OR DAMAGED
1.4	MECHANICAL INSTALLATION TOOLS
1.5	FOUNDATION INTERFACE
II	ANTENNA SYSTEM ASSEMBLY
2.0	REFLECTOR & SUPPORT ASM PART LIST
2.1	ANTENNA ASSEMBLY
2.2	FEED SUPPORT PART LIST
2.3	FEED SUPPORT ASSEMBLY
III	SATELLITE ALIGNMENT
3.0	ANTENNA POINTING
IV	MAINTENANCE
4.0	MAINTENANCE OVERVIEW
4.1	REFLECTOR
4.2	MOUNT & REFLECTOR SUPPORT
4.3	FEED & FEED SUPPORT

SECTION I INTRODUCTION**1.0 GENERAL INFORMATION**

This manual describes the assembly and installation of Prodelin's .89/.98 meter antenna systems. The Prodelin .89/.98 meter is a rugged and reliable mount which will operate in the Ku-Band frequency with high efficiency and at the same time successfully withstand the effects of the environment. Prodelin's .89/.98 Meter antennas have an F/D ratio of .8, an offset angle of 16°, and is commonly used with a 39° Prodelin Feed Horn.

These instructions are listed by sections that cover all areas of assembly and installation. Additional sections are included in the manual to provide information on antenna alignment to the satellite and maintenance.

1.1 UNPACKING AND INSPECTION

The system containers should be unpacked and inspected at the earliest date to insure that all material has been received and is in good condition. A complete packing list for each major component is supplied.

1.2 FREIGHT DAMAGE

Any damage to materials while in transit should be immediately directed to the freight carrier. He will instruct you on matters regarding any freight damage claims.

1.3 MATERIAL – MISSING OR DAMAGED

Any questions regarding missing or damaged materials that are not due to the freight carrier should be directed to Prodelin's Customer Service Department at:

**PRODELIN CORPORATION
1500 Prodelin Drive
Newton NC 28658
USA
(828) 464-4141**

1.4 MECHANICAL INSTALLATION TOOLS

The hardware supplied with this antenna system is U.S. SAE standard size. However, the sizes have been chosen to allow use with compatibly sized metric wrenches as shown in the table below.

HARDWARE SIZE	SAE WRENCH SIZE	METRIC WRENCH SIZE	MAXIMUM REC. TORQUE
5/16" Bolt	1/2"	13 mm	12 ft-lbs (16.27 n-m)
1/4" Bolt	7/16"	11 mm	6 ft-lb (8.14 n-m)
3/8" Bolt	9/16"	15 mm	22 ft-lbs (29.83 n-m)
1/2" Bolt	3/4"	19 mm	45 ft-lbs (61.02 n-m)


Also recommended for installation:

Compass - graduated to .5°
Adjustable Wrench

1.5 FOUNDATION INTERFACE

The required interface from the foundation to the mount is 2-1/2" schedule 40 pipe (2.88" O.D.). A suggested in-ground foundation is shown in Figure 1.







Also available from Prodelin, as options, are a kingpost pedestal mount and a non penetrating mast mount.

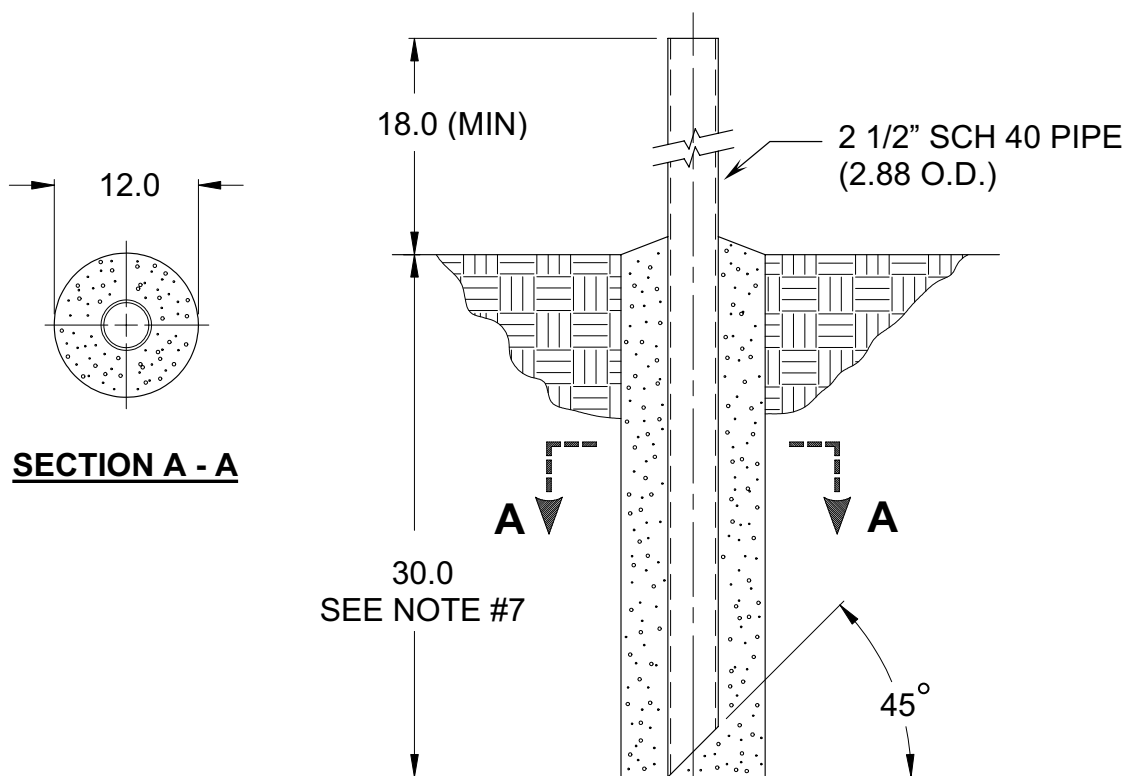SUGGESTED IN-GROUND FOUNDATION**FIGURE 1.****NOTES:**

1. 2 1/2" schedule 40 pipe should conform with ASTM A53.
2. All concrete should conform to building code standards and have a minimum compressive strength of 3000 PSI at 28 days. (Per ACI-318-77)
3. Soil bearing capacity should be no less than 2000 PSF.
4. Concrete should be poured against undisturbed soil.
5. Allow concrete 24 hours set time before installation of antenna.
6. The antenna should be properly grounded to meet applicable local codes.
7. Minimum depth as shown or extend to local frost line.
8. Foundation meets the design requirements as set forth by the uniform building code. (1982 edition)

(PRODELIN CORPORATION DOES NOT REPRESENT OR WARRANT THAT ANY PARTICULAR DESIGN OR SIZE OF FOUNDATION IS APPROPRIATE FOR ANY LOCALITY OR EARTH STATION INSTALLATION.)


SECTION II REFLECTOR AND SUPPORT ASSEMBLY

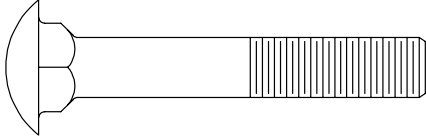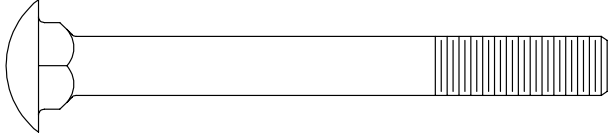REFLECTOR AND SUPPORT ASSEMBLY PART LIST- TABLE 2.0			
ITEM	PART NO.	DESCRIPTION	QTY
1	VARIES	.89/.98M Reflector	1
2	0185-171	Az/EI Positioner Assembly	1
3	0158-093	Interface Plate	1
4	8038-012	5/16" x 2.00 Carriage Bolt 	2
5	8038-024	5/16" x 3.00 Carriage Bolt 	2
6	8032-008	3/8" x 1.00 Hex Bolt 	4
7	8201-042	3/8" Flatwasher 	8
8	8202-042	3/8" Lockwasher 	4
9	8102-007	3/8" Hex Nut 	4
REFLECTOR AND SUPPORT ASSEMBLY PART LIST- TABLE 2.0			

ITEM	PART NO.	DESCRIPTION	QTY
10	8201-041	5/16" Flatwasher	4
11	8202-041	5/16" Lockwasher	4
12	8101-009	5/16" Hex Nut	4

2.1 ANTENNA ASSEMBLY

CAUTION: During the assembly procedure, the sequence of instructions must be followed. **Do Not Tighten Any Hardware Until Instructed.** Refer to the parts list table and the referenced steps.

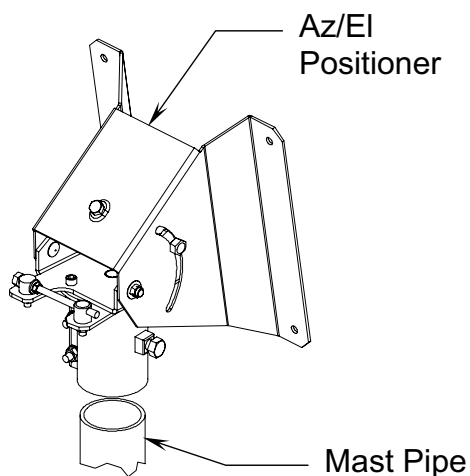


STEP 1.


Slip the Az/EI Positioner (item 2) onto the mast pipe as shown. Point Az/EI in general direction of satellite azimuth heading and tighten the canister bolts at this time.

STEP 2.

Attach Interface Plate (item 3) to the az/el positioner using the 3/8" hardware provided (items 6,7,8,9) as shown. Tighten completely.

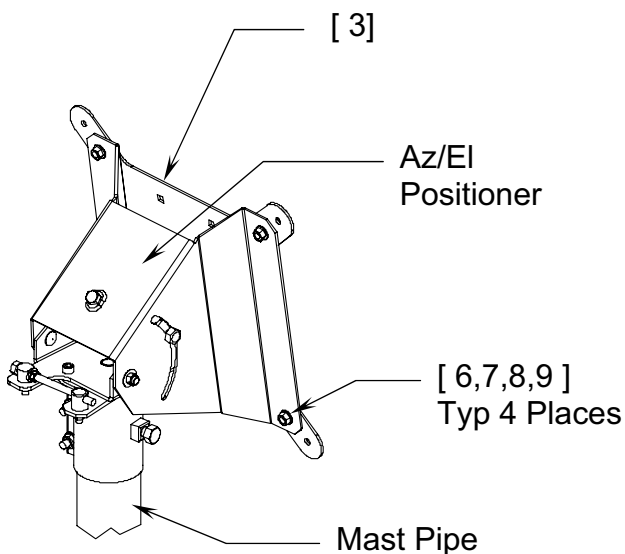
**STEP 3.**



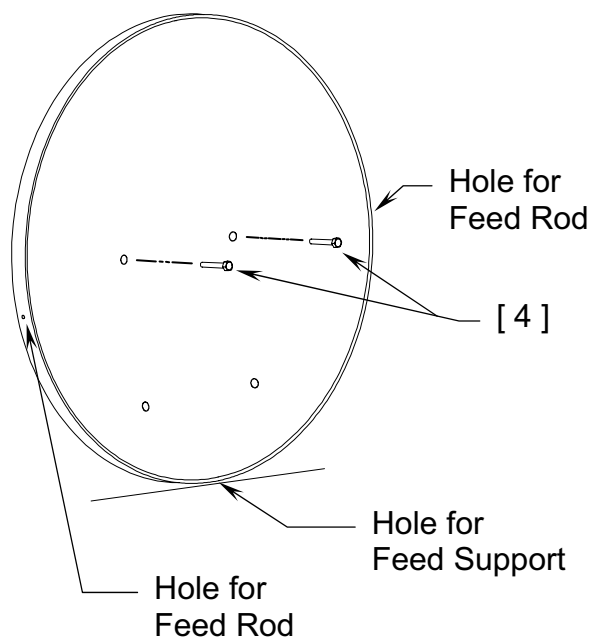


Stand the reflector on its bottom edge and insert two 5/16"x 2.00" carriage bolts (item 4) thru the top two holes as shown.



STEP 4.

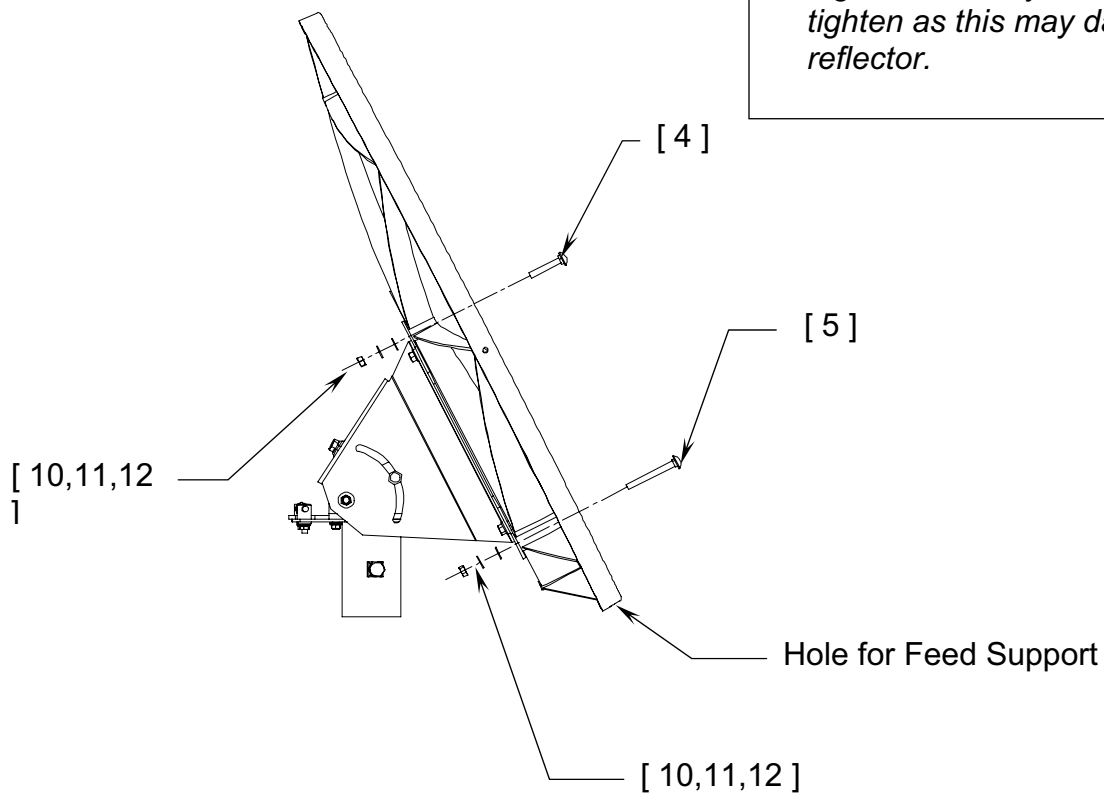- A) With the top two bolts in place, lift the reflector to the reflector support so that the top two bolts pass thru the two holes in the upper crossarm. Secure the two bolts with 5/16" hardware (items 10,11,12).
- B) Insert two 5/16"x 3.00" carriage bolts (item 5) thru the bottom two holes and secure with (items 10,11,12). *Tighten securely but do not over tighten as this may damage the reflector.*



FEED SUPPORT PART LIST - TABLE 2.2			
ITEM	PART NO.	DESCRIPTION	QTY
1	VARIES	Feed Rod	2
2	VARIES	Feed Support Tube	1
3	8030-008	1/4" x 1.00 Hex Bolt 	3
4	8030-022	1/4" x 3.00 Hex Bolt 	1
5	8201-040	1/4" Flatwasher 	8
6	8202-040	1/4" Lockwasher 	4
7	8100-007	1/4" Hex Nut 	4


2.3 FEED SUPPORT ASSEMBLY

These instructions are intended as a general reference for feed support assembly. If your antenna system has specific feed support installation instructions, then refer to them at this time.


CAUTION: During the assembly procedure, the sequence of instructions must be followed. **DO NOT TIGHTEN ANY HARDWARE UNTIL INSTRUCTED.** Refer to the feed support parts list and steps.

STEP 1.

Attach the feed rods to the reflector with 1/4" x 1.00 bolt (item 3) and secure with 1/4" hardware (items 5, 6, 7). See Detail "A".

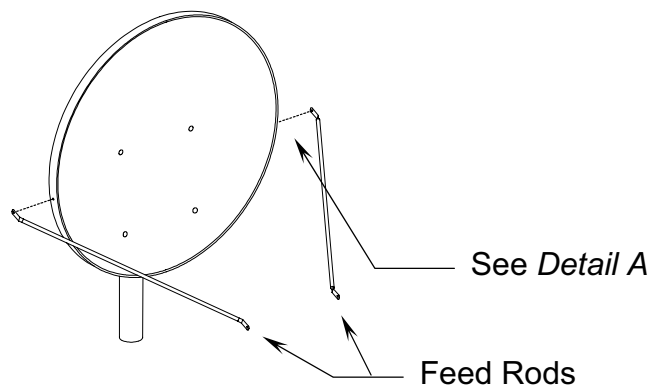**STEP 2.**


Connect the ends of the feed rods to the feed support tube with 1/4" x 3.00 bolt (item 4) and secure with hardware (items 5, 6, 7). See Detail "B".

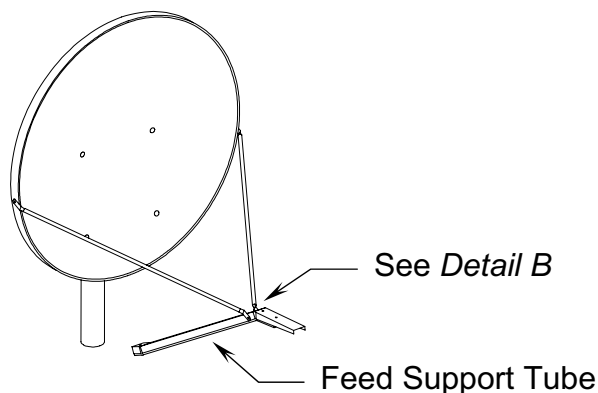
**STEP 3.**

A) Attach feed support tube to the bottom of the reflector with 1/4" x 1.00 bolt (item 3) and secure with hardware (items 5, 6, 7).


B) Tighten the 1/4" hardware at the reflector rim snugly. Next, tighten the hardware that connects the feed rods to the feed support tube.

C) Refer to separate instructions for the specific feed/ODU assembly to the feed support.

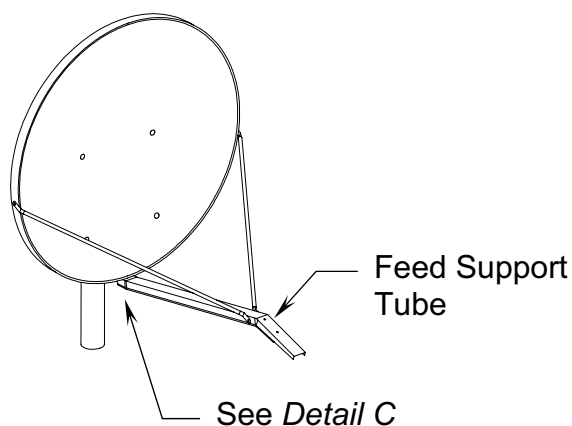


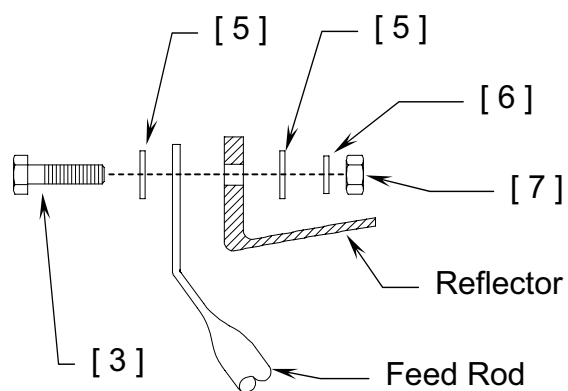

Detail A

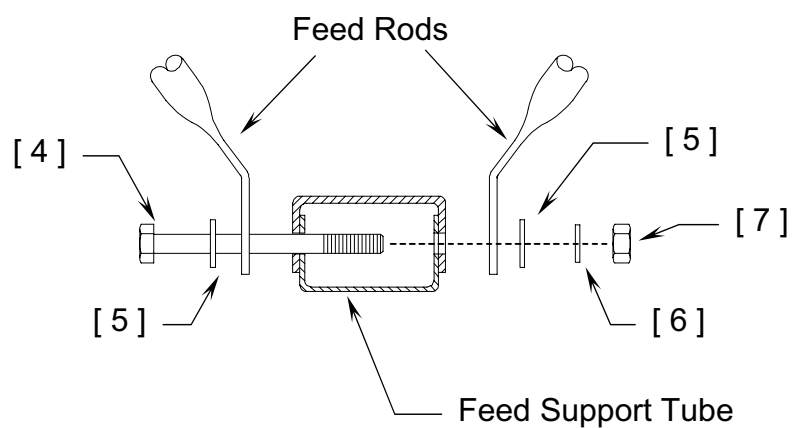

Detail B

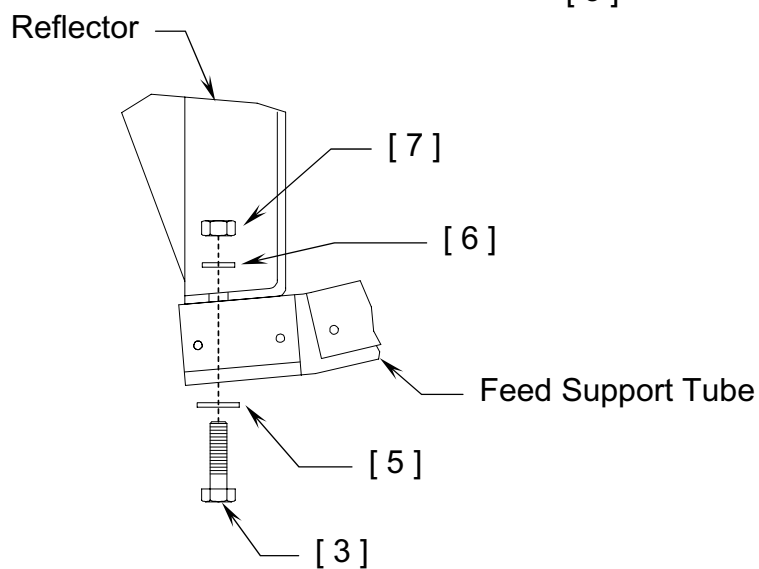

Detail C

SECTION III ANTENNA POINTING**3.0 ANTENNA POINTING**

The .89/.98 meter reflector contains a 16° elevation offset look angle. Therefore, when the reflector aperture is perpendicular to the ground, the antenna is actually looking 16° in elevation. Refer to Figure 2.

Note: The following alignment procedure is intended only as a general reference guide for this antenna. For proper antenna performance, accurate alignment is critical. Therefore, it is recommended that your own detailed procedure be used or contact Prodelin's Technical Support Department for additional recommendations.

- STEP 1:** Adjust the reflector up or down in elevation by turning the 5/16" Bolt at the az/el positioner until the desired elevation is read on the '**B side**' of the positioner. This scale is used for nominal readings and is accurate to ±2 degrees. Note: Be sure that the elevation pivot hardware is loose enough to allow adjustment without damaging (bending) the elevation rod. Snug the hardware.
- STEP 2:** Azimuth Adjustment: With the electronics set to acquire the satellite, rotate the antenna in azimuth until the satellite is found. Tighten the canister hardware at this time.
- STEP 3:** Fine azimuth adjustment is achieved by loosening the three hex nuts inside the Az/el positioner and turning the single hex bolt at the back of the positioner in either direction.
- STEP 4:** Peak the antenna signal by fine adjustments made in both azimuth and elevation until the optimum signal is achieved.
- STEP 5:** Tighten all hardware used for adjustment.

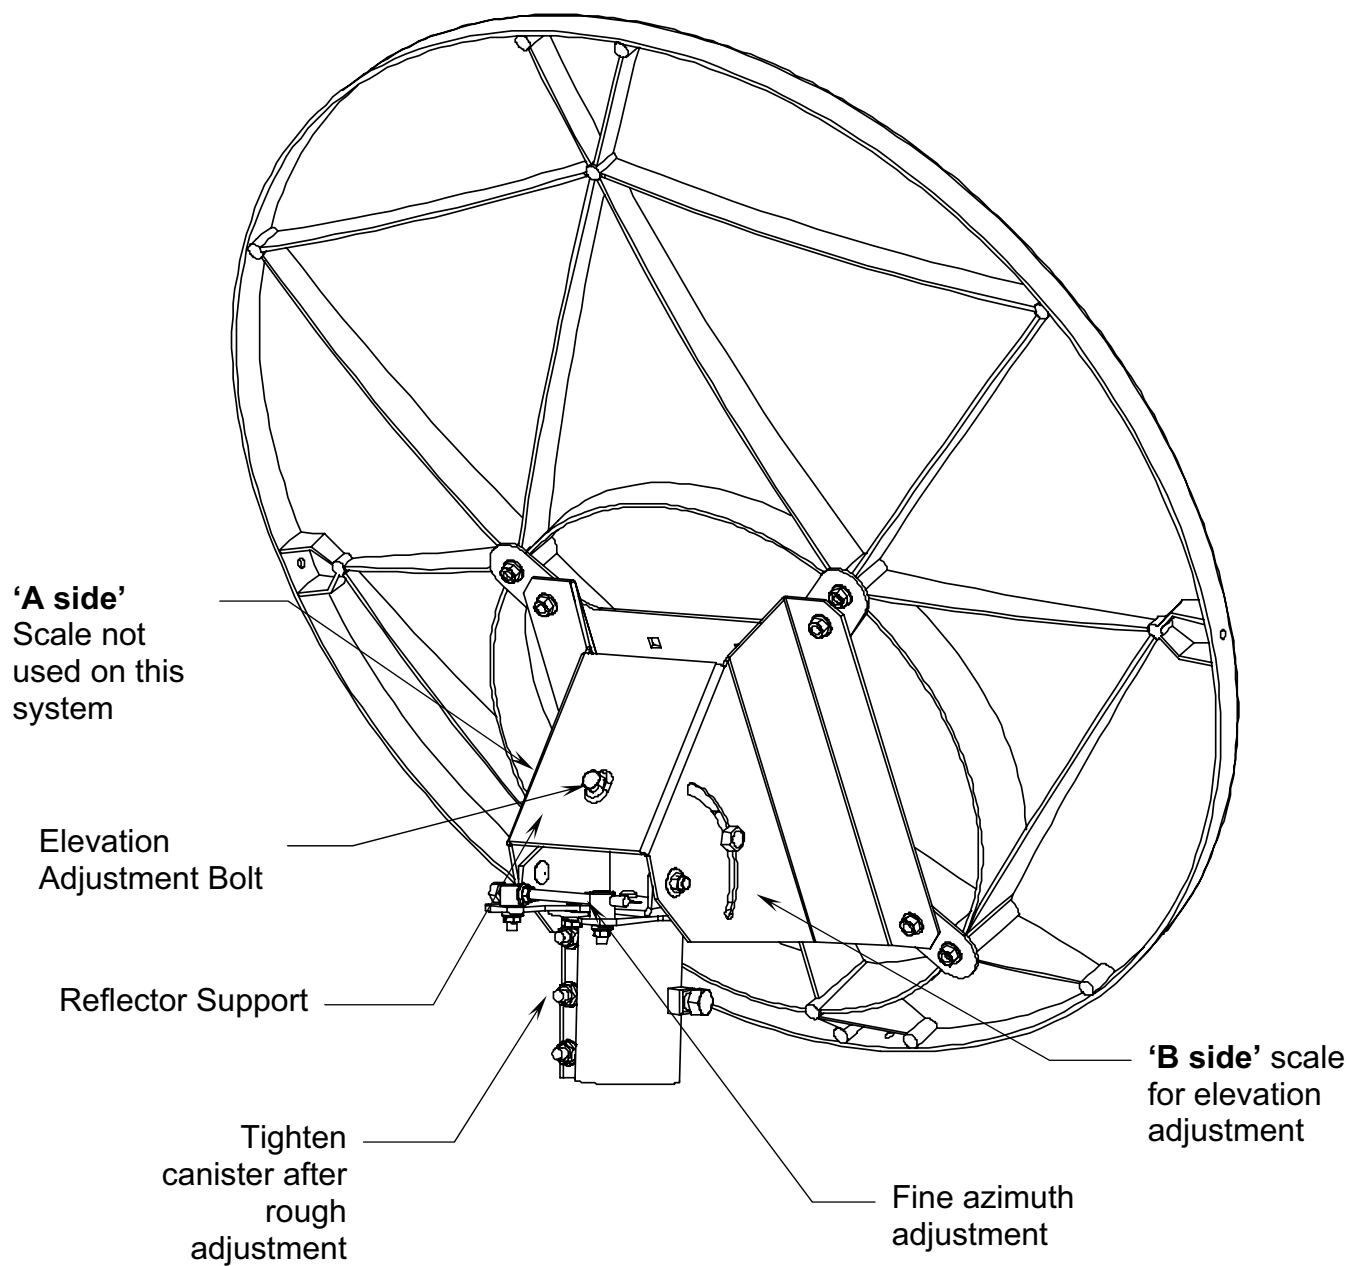


FIGURE 2.

SECTION IV MAINTENANCE**4.0 MAINTENANCE OVERVIEW**

After installation, the antenna requires only periodic inspection. It is anticipated that maintenance, if required, will be minimal and easily handled by a local or in-house maintenance staff.

4.1 REFLECTOR

Prodelin's reflector does not require any maintenance. The composite construction of the reflector is virtually impervious to any damages that could be caused by weather or atmospheric conditions. It is only necessary to inspect for any physical damage done by vandalism or very severe weather conditions.

Should any damage be detected to a portion of the reflector, contact the Customer Service Department at Prodelin for recommendations involving reflector repair.

4.2 MOUNT AND REFLECTOR SUPPORT STRUCTURE

The mount and reflector support structure supplied with this antenna is of steel construction and has a powder painted finish.
If there are any signs of structural failure, the mount members that are damaged should be repaired or replaced.

4.3 FEED AND FEED SUPPORT

The feed support and feed rods should be inspected to insure that all hardware is secure. The feed/radio mounting bolts should be tight.

The feed horn window should be inspected to insure that it is intact so that no moisture can collect inside the feed horn.